Category 6A 650MHz FTP CMP Solid Copper Cable

PRODUCT SPECIFICATION

Package includes:

A. Category 6A FTP CMP Solid Copper Cable, 1000 ft/reel

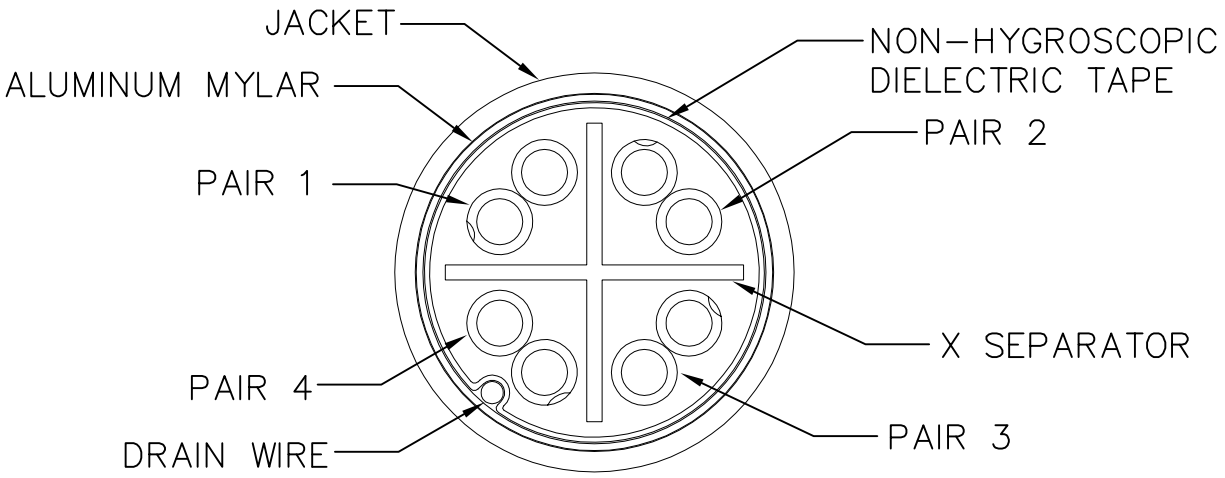

PAIR 1: BLUE & WHITE/BLUE
PAIR 2: ORANGE & WHITE/ORANGE
PAIR 3: GREEN & WHITE/GREEN
PAIR 4: BROWN & WHITE/BROWN

Features and Benefits:

- Complies with IEEE 802.3an 10G BASE-T and TIA-568-C.2 standards.
- Easy to dispense cable with reel design, saving your time and energy on the job site.
- Convenient sequential footage markings for usage tracking.
- Commercial / Flame rated required in most commercial installations.
- ETL verified TIA/EIA 568-C.2 for maximum performance.
- UL 1863 compliant.

CABLE, CAT6A, FTP, 23AWG, 4P, CMP, 1000ft			
ITEM NO.	ICCABP6FXX	REV. B	
DWG NO.	PSCABP6FXX	PAGE NO. 1	

ICC
Premium Products
Proven Performance
Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2010 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.

CATEGORY 6A 650MHz FTP CABLE ELECTRICAL PERFORMANCE (100 METER/328 FT)									
								ALIEN CROSSTALK	
FREQ. (MHz)	INSERTION LOSS, MAX. (dB/100M)	RETURN LOSS MIN. (dB/100M)	NEXT MIN. (dB/100M)	PS NEXT MIN. (dB/100M)	ACRF MIN. (dB/100M)	PS ACRF MIN. (dB/100M)	PROPAGATION DELAY MAX. (dB/100M)	PS ANEXT MIN (dB/100M)	PS AACRF MIN (dB/100M)
1.0	2.1	20.0	78.3	76.3	71.8	68.8	570.0	77.0	77.0
4.0	3.8	24.2	69.3	67.3	59.8	56.8	552.0	77.0	76.2
8.0	5.3	26.3	64.8	62.8	53.7	50.7	546.7	77.0	70.1
10.0	5.9	27.0	63.3	61.3	51.8	48.8	545.4	77.0	68.2
16.0	7.5	27.0	60.2	58.2	47.7	44.7	543.0	77.0	64.1
20.0	8.4	27.0	58.8	56.8	45.8	42.8	542.0	77.0	62.2
25.0	9.4	26.3	57.3	55.3	43.8	40.8	541.2	77.0	60.2
31.25	10.5	25.6	55.9	53.9	41.9	38.9	540.4	77.0	58.3
62.5	15.0	23.5	51.4	49.4	35.9	32.9	538.6	76.6	52.3
100.0	19.1	22.1	48.3	46.3	31.8	28.8	537.6	72.5	48.2
155.0	24.1	20.8	45.4	43.4	28.0	25.0	536.9	69.6	44.4
200.0	27.6	20.0	43.8	41.8	25.8	22.8	536.5	68.0	42.2
250.0	31.1	19.3	42.3	40.3	23.8	20.8	536.3	66.5	40.2
300.0	34.3	18.8	41.1	39.3	22.3	19.3	536.1	65.3	38.7
350.0	37.2	18.3	40.1	38.1	20.9	17.9	535.9	64.3	37.3
400.0	40.1	17.9	39.3	37.3	19.8	16.8	535.8	63.5	36.2
500.0	45.3	17.5	37.8	35.8	17.8	14.8	535.6	62.0	34.2
550.0*	47.7	17.2	37.2	35.2	–	–	–	–	–
600.0*	50.1	16.9	36.6	34.6	–	–	–	–	–
650.0*	52.3	16.7	36.1	34.1	–	–	–	–	–

*FREQUENCIES ARE FOR REFERENCE ONLY

NOTES: UNLESS OTHERWISE SPECIFIED

1. DESCRIPTION
   A. RATED TEMPERATURE: 75°C
   B. FLAME TEST: FT6
2. ELECTRICAL PROPERTIES:
   A. CONDUCTOR DCR: 9.38 OHMS/100M @20°C
   B. DCR UNBALANCE: 3% MAX
   C. CAPACITANCE UNBALANCE PAIR/GROUND: 330°F/100M MAX
   D. INPUT IMPEDANCE: 100 OHMS±10% (10-550MHz)
      100 OHMS±12% (1-100MHz)
      100 OHMS±15% (>100-350MHz)
      100 OHMS±22% (>350MHz)
   E. PROPAGATION DELAY SKEW: 25 ns/100M MAX
   F. NOMINAL VELOCITY OF PROPAGATION (NVP): 70%
   G. INSTALLATION TEMPERATURE: 32°~140°F
   H. OPERATIONAL TEMPERATURE: -4°~167°F
3. PERFORMANCE:
   A. SEE TABLE ABOVE
4. PRODUCT STANDARD CERTIFICATION:
   A. IEEE 802.3an 10G BASE-T
   B. TIA-568-C.2
   C. UL
   D. ETL
5. BEND RADIUS: 1.34"
6. CABLE COLOR: XX = BL (BLUE)
7. PACKAGING:
   A. BULK PACKAGE: 1000 FT/BOX
   B. REEL SIZE: 17.3W X 13.0H
   C. WEIGHT: 50.7 LBS

CABLE CONSTRUCTION		
		CMP
CONDUCTOR	SIZE	23AWG x 4P
	CONTRUCTION	SOLID BARE COPPER
SEPARATOR	MATERIAL	FEP
INSULATION	MATERIAL	FEP
JACKET	DIAMETER	0.34"
	MATERIAL	LOW SMOKE, FLAME RETARDANT PVC

PART NUMBER	DESCRIPTION
ICCABP6FBL	CAT6A 650MHz FTP SOLID CABLE, 23 AWG, 4 PAIR, CMP, 1000FT, BLUE

UL c UL FILE NO. 320548

CABLE, CAT6A, FTP, 23AWG, 4P, CMP, 1000ft			
ITEM NO.	ICCABP6FXX	REV.	B
DWG NO.	PSCABP6FXX	PAGE NO.	2

ICC
*Premium**Products***
*Proven**Performance***
*Competitive**Prices***

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 * www.icc.com

© 2010 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.